FMKC023 Hose location Instructions

Please thoroughly read through and familiarise yourself with these instructions in their entirety prior to beginning any part of the installation process of any component. Please also ensure the vehicle and engine has cooled down sufficiently to avoid risking possible skin burns or other injury.

TOOLS NEEDED:

Hose clamp removal tool/long nose plyers

7mm socket ratchet

Below is a diagram to where each hose from the FMKC023 kit locates in the Hyundai engine bay. Please note there will be one hose left over after installation is completed as there is a different hose for the lower radiator depending if you have a vehicle equipped with a menual or DCT transmission.

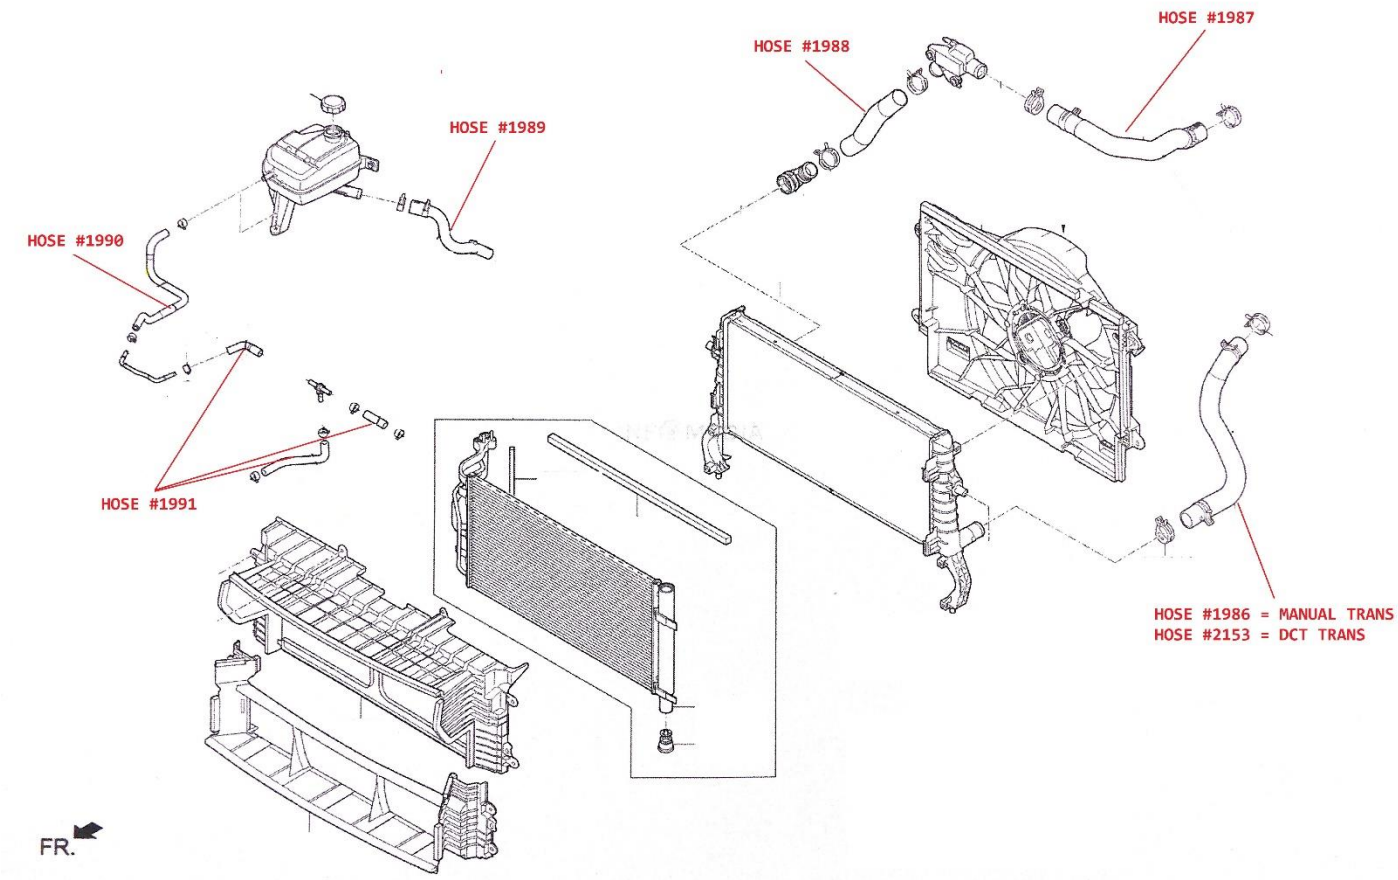

Please make sure the coolant is cold before starting. And remove the coolant expansion cap before starting to release any built up pressure.

This is a finished picture of the coolant hoses

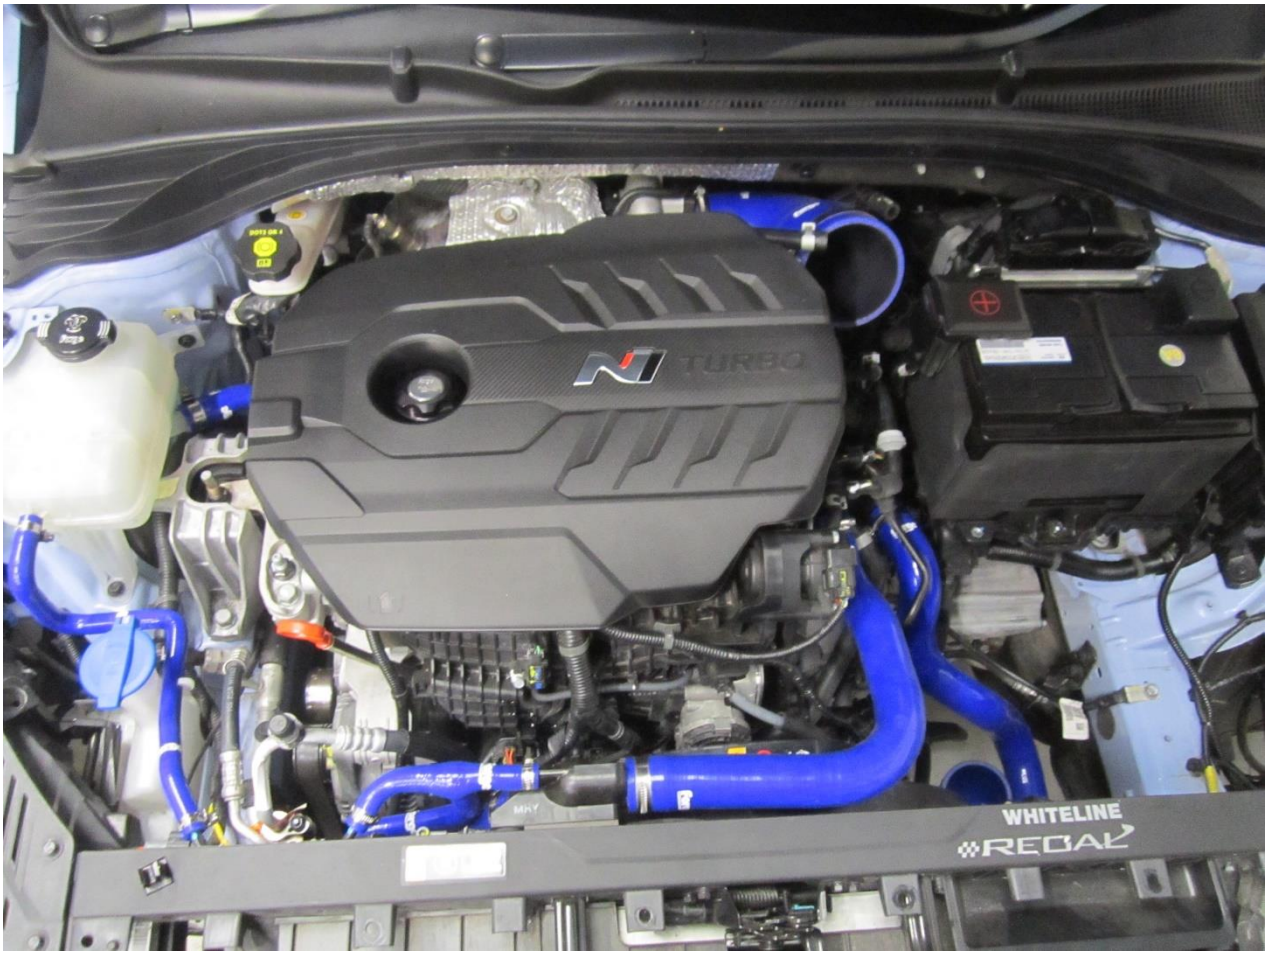
TURBO
WHITELINE
REGAL